
АБРАЗИВОУСТОЙЧИВИ - ABRASION RESISTANT

Abraflex SES55 S&D 5 bar Semperit

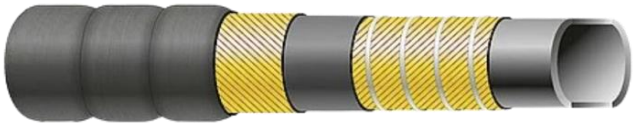

Смукателно-нагнетателен маркуч за абразивни материали.
Вътрешна камера: черна SBR/NR/BR, устойчива на абразия, антистатична, гладка.
Текстилни оплетки, вградена двойна стоманена спирала.
Външна обвивка: черна SBR/EPDM, устойчива на озон, плоско гофрирана.
Температурен режим: -35°C +80°C.
Приложение: изключително гъвкав смукателно-нагнетателен маркуч за пренос на абразиви - пясък, чакъл.
Специално проектиран за материали, които образуват статично електричество.

Suction and delivery hose for abrasive materials.
Tube: black SBR/NR/BR, abrasion resistant, antistatic, smooth.
Reinforcement: Textile wrapped, double steel wire helix.
Cover: black SBR/EPDM, resistant to ozone and weather, antistatic, flat corrugated with cloth impression.
Working temperature: -35°C +80°C.
Application: A highly flexible suction and delivery hose for conveying abrasive media, e.g. send, refuse, grit.
Especially for media which is subject to the build-up of static electricity.

Кат. № / Part. №	вътрешен диаметър / ID		външен диаметър / OD		работно налягане / WP		разрушаващо налягане / BP		радиус на огъване / BR	вак.% vac%	тегло/m weight/m
	mm	inch	mm	inch	bar	psi	bar	psi	mm	bar	kg/m
SES55038	38	1,1/2"	48		5	75	15	225	110	90,0	0,800
SES55050	51	2"	61		5	75	15	225	130	90,0	1,250
SES55062	63	2,1/2"	73		5	75	15	225	160	90,0	1,650
SES55075	76	3"	86		5	75	15	225	190	90,0	1,850
SES55100	102	4"	114		5	75	15	225	255	90,0	2,900
SES55125	127	5"	139		5	75	15	225	320	90,0	3,950
SES55150	152	6"	164		5	75	15	225	380	90,0	4,800