
МАРКУЧ СДВОЕН КИСЛОРОД И АЦЕТИЛЕН
TWIN HOSE OXYGEN AND ACETYLENE

SEMPERIT TWIN Welding/Gas 20bar red/blue ISO 3821 (EN 559)

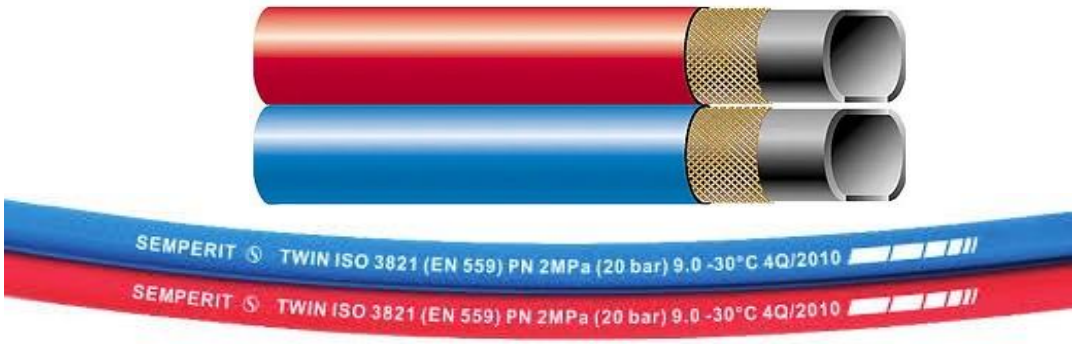

Сдвоен нагнетателен маркуч за пренос на кислород и ацетилен, ISO 3821:2019 (пред. EN559:2003).
Вътрешна камера: EPDM, черна, гладка.
Текстилна спирала.
Външна обвивка: EPDM, Червена и синя, гладка.
Температурен режим: -30°C +70°C.
Приложение: нагнетателен маркуч за заваряване и рязане, за дъгово заваряване под защитен газ.
Подходящ е за въглищен газ, въглероден диоксид, аргон, азот. Не е подходящ за LPG, MPS и CNG.

Twin delivery hose for transporting of oxygen and acetylene, ISO 3821:2019 (foremly EN559:2003).
Tube: EPDM, black, smooth.
Reinforcement: Textile spiral.
Cover: EPDM, blue and red, smooth.
Working temperature: -30°C +70°C.
Application: delivery hose for welding and cutting, for arc welding under protective gas.
Also suitable for coal gas, carbon dioxide, argon, nitrogen. Not suitable for LPG, MPS and CNG.

Кат. № / Part. №	вътрешен диаметър / ID		Външен диаметър / OD	Работно налягане / WP		Разрушаващо налягане / BP		Радиус на огъване Bending radius	Тегло Weight
	Oxygen	Acetylene							
	mm	mm	mm	bar	psi	bar	psi	mm	kg/m
GOXGAC0608 *	6.3	8.0	14.0	20	300	60	900	40	0.370
GOXGAC0808 *	8.0	8.0	14.0	20	300	60	900	40	0.370
GOXGAC0404 **	4.0	4.0	11.0	20	300	60	900	40	0.230
GOXGAC0505 **	5.0	5.0	11.0	20	300	60	900	40	0.270
GOXGAC0606 **	6.3	6.3	12.3	20	300	60	900	40	0.310
GOXGAC0609 **	6.3	9.0	15.0	20	300	60	900	45	0.450
GOXGAC0909 **	9.0	9.0	15.0	20	300	60	900	45	0.400
GOXGAC1010 **	10.0	10.0	16.0	20	300	60	900	50	0.430

* Поддържа се на склад

** Доставя се след запитване и заявка

* Available on stock

** Delivery upon request